

REVIEW

Network Diffusion and Technology Acceptance of A Nurse Chatbot for Chronic Disease Self-Management Support : A Theoretical Perspective

Joannes Paulus Tolentino Hernandez^{a,b}

^aStudent, Doctor of Communication Program, Faculty of Information and Communication Studies (FICS), University of the Philippines Open University (UPOU), Los Baños, Laguna, Philippines, ^bLecturer, Medical Surgical Department and Director, Skills Development Unit, Vice Deanship of Quality and Development, College of Nursing (CON), University of Ha'il, (UOH), Ha'il, Kingdom of Saudi Arabia

Abstract : Telenursing is one type of telehealth service delivery proposed to resolve the predicted gap between healthcare workforce demand and supply globally. The aim of this article is to explore the 'Nurse Chatbot' for chronic care on the benefits of increasing patient/client access to healthcare information and maximizing the potential of artificial intelligence/AI to bridge the 'demand-supply gap' of human healthcare providers. Moreover, closing this gap through the establishment of a 'Nurse Chatbot' will be innovative, favorably scalable and customizable within a decentralized health network, and potentially sustainable in the new digital economy. Following are the assumptions : 1) "caring" communicated textually is highly 'transactive' in chronic disease self-management support/CDSMS for goal agreements between agents and for overcoming the system noise in the form of cross-entropy, perplexity, and information wastage ; 2) 'Nurse Chatbot' is the interlocutor in nursing care and the nursing agency by superpositioning and entanglement ; and 3) possible effects of chatbot-user transactions are information flows, management of health, and patient satisfaction. This article also looks into 'Nurse Chatbot' development for CDSMS, simulation of its diffusion capacity egocentrically, technology acceptance model/TAM to inquire the engagement of users, and possible approaches to ethical and safety issues. *J. Med. Invest.* 66 :24-30, February, 2019

Keywords : artificial intelligence, nurse chatbot, chronic disease self-management support, network diffusion, technology acceptance model

INTRODUCTION

The impacts of artificial intelligence/AI to major industries worldwide cannot be ignored. In healthcare, AI has led to the inception of a 'cognitive hospital' and efficient resource management ; knowledge discovery in large datasets and literature for pharmacological and clinical studies ; treatment decisions ; advanced medical diagnostics ; surgical robots ; mobile health technologies for health assessments and medication adherence with chatbots or virtual care assistants ; home care robots ; and public health (1).

Currently, AI seems to push the frontier of the healthcare system capacity on its benefits of delivering reliable and personalized care and promoting self-efficacy to patients versus the number of risks which are articulated ethically and socially (1). AI diverges into multiple technologies that can augment human activities (2) in the form of machine learning, to process and learn with raw data (3) and deep learning (4), to simulate decision-making using complex artificial neural networks. One of its major impacts is on preventive medicine (5) which has become a powerful clinical decision aide tool (6).

Another technology of interest in this article is telehealth. Telehealth can reduce hospital visits of patients by widening their access to healthcare (7) and covering for non-patient care activities

(e.g., documentation, prescriptions, etc.) which take much time (2). More importantly, it can address the asymmetry between demand and supply of global healthcare workforce in the future. Unfortunately, only 65 million can be supplied when the need for healthcare workers doubles to 80 million by 2030 (8). The calculated gap is at 20 percent which is around 15 million (2).

Aside from potentially filling the 'demand-supply gap' (2, 8), telehealth has already been an effective alternative healthcare delivery to offer long-term solutions for acute and post-acute care, and chronic disease management (7). On the other hand, technological limitations continue to exist in spite of robust information technology/IT developments for its effective implementation along with regulatory and financial issues (9). On this note, any means of optimization affecting the telehealth ecosystem should lead to "...more efficient utilization of virtual care solutions" (7).

Leveraging AI's economic side suggests (re)thinking about the service industry culture of "growth and productivity performance" seen in highly technological societies like Japan (10) and the technology acceptance of stakeholders being more dynamic since it is embeddable into various telehealth services. Robotics and automation, internet of things, cloud computing, big data analytics, and AI constitute the fourth industrial revolution-the "New Digital Economy" (11), and it stretches to underscore efficiency in business processes. The 'Nurse Chatbot' is innovative, favorably scalable and customizable within a decentralized health network, and may become sustainable in this era following the projected increase in AI use in healthcare and its investment (12).

Moreover, use of chatbots offers a practice leap in nursing care and nurses' skill set towards achievement of "Healthy People 2020" as envisioned by The American Nurses Association (13) which aims to increase "mobility" (healthcare delivery), "communication"

Received for publication October 30, 2018 ; accepted November 2, 2018.

Address correspondence and reprint requests to Joannes Paulus Tolentino Hernandez, P. O. Box 2440, University of Ha'il, Main Campus Male, Building 9, College of Nursing, Room 2, Vice Deanship of Quality and Development, Baqaa Road, Ha'il City, Kingdom of Saudi Arabia 81451. E-mail : jphernandezrn@gmail.com, j. hernandez@uoh.edu.sa

(information and knowledge exchange), and “relationships” (linkages) since telehealth, specifically ‘telenursing,’ will boost technological competency among nurse practitioners. It is also commendable on the notion of reducing medical costs with technology innovations (7, 13, 14) and theoretically may result to a decrease in ‘digital divide’ since demands for internet access will increase for the service providers. Emerging technologies (e.g., exceptionally novel or cost-effective solutions that can potentially ‘reengineer’ the healthcare delivery system) may have great impacts to population health outcomes, healthcare quality, and health equity (13).

The technical feasibility of developing and implementing a ‘Nurse Chatbot’ is realistic based on the available evidence of chatbot designs and chatbot-delivered/mediated interventions (15). However, not much is known about human-computer/intelligent machine interaction in the ‘communicative’ dimension (zooming into message content and meaning, networks, and functions to account the logic of connections/causality) which can be intriguingly captured by theorizing : first, the textual properties of “caring” transmitted between healthcare chatbots and users ; and second, the formation of ego-centric relationships (i.e. from chatbot to users) to optimize delivery of care.

The aim of this article is to explore the ‘Nurse Chatbot’ for chronic care on the benefits of increasing patient/client access to healthcare information and maximizing the potential of AI to bridge the ‘demand-supply gap’ of human healthcare providers.

CARING AS COMMUNICATION (TRANSACTIONS)

The dominant framework of this article comes from the “*Transactional Relationship Theory of Nursing*” /TRETON by Tanioka (16) articulating the relationship between human agent (the ‘nursed’) and non-human agent (the ‘Nurse Chatbot’) to address “caring”. In this article, the theory will be used for the following : (a) to create the chatbot-based telenursing model of communication ; (b) to describe the diffusion and technology acceptance of the ‘Nurse Chatbot’ for chronic care ; (c) to elucidate the elements of “*transactions*” (chat history) between conversations, relationships, and interactions (i.e. directed/one-way and undirected/two-way) based on Dubberly and Pangaro’s model of second-order cybernetics (17) ; and (d) to address the basic physical paradoxes with the latter against the limitations of early models like ‘complexity,’ ‘unpredictability,’ ‘general relativity,’ and ‘entropy’ (18) for designing the ‘Nurse Chatbot’ telenursing system for chronic disease self-management support/CDSMS.


Cybernetic communication by Craig (19) depends on information processing against noise, in the form of noisy data, word

meaning ambiguity/uncertainty, multilingual data, etc. (20), which is concurrent with message transmission. Thus, ‘redundancy’ and ‘signal amplification’ are necessary. On the other hand, AI-powered chatbots will be efficient in the following : (a) capturing message history (fidelity) ; (b) understanding meanings (semantics) with open-source syntax parsers (e.g., SyntaxNet, ParseySaurus) ; and (c) connecting information across human-to-human or human-to-machine communications (networking). Virtual CDSMS in cases of blood sugar control, blood pressure control, and cancer fatigue and depression seems highly ‘transactive,’ i.e. metrically in the following : (a) two-way information processing analytics from encoding to decoding of goal and agreement messages (e.g., *n*-gram modeling/computing the word frequencies and correlations) ; (b) ‘information wastage ratio’ (*Wr*) from Flor’s theorem of information overload with ‘informatization’ (21), expressed as 1 minus information utilization (*IU*) divided by information generation (*IG*) when producing and managing the knowledge base for CDSMS in the system ; and (c) system interference values (e.g., noise, mutual information loss or distortions/uncertainty, cross-entropy, and perplexity).

ROLE OF NURSE CHATBOT

Ideation of a dynamic state when “*knowing persons*” (i.e. technological knowing, designing, and participative engaging) along the Möbius is attributed to Locsin and Purnell (22). Hence, virtually “*knowing persons*” with the ‘Nurse Chatbot’ poses a similar inclination. Use of quantum theory (in complex networks) to explain the frontiers of real world communication allows the context of (multipartite) ‘entanglement’ to be visualized in graph states where actors/nodes are independent of physical links/edges (23) in the same dimension. These may be portrayed in space-time by the ‘chirality’ (opposite rotations) of two entangled Möbius bands (Fig. 1). On the other hand, to understand the ‘communicative actions’ of agents and how they configure (arbitrarily ‘translocate’ roles) across two Möbius topologies, the agency framework of organizational communication by Saludadez (24), consisted of upstream agents, interlocutors/middle agents, and downstream agents, is applicable here in order to study the ‘edge entanglement’ (referring to multidimensional/multilayered interactions) through multiplex network analysis (25).

The ‘Nurse Chatbot’ can simulate ‘autonomy’ (judgment) in providing CDSMS (e.g., determining informational healthcare resources, setting goals for behavior modifications based on self-efficacy, and offering options to increase adherence with prescribed medications and health-promoting behaviors based on predicted

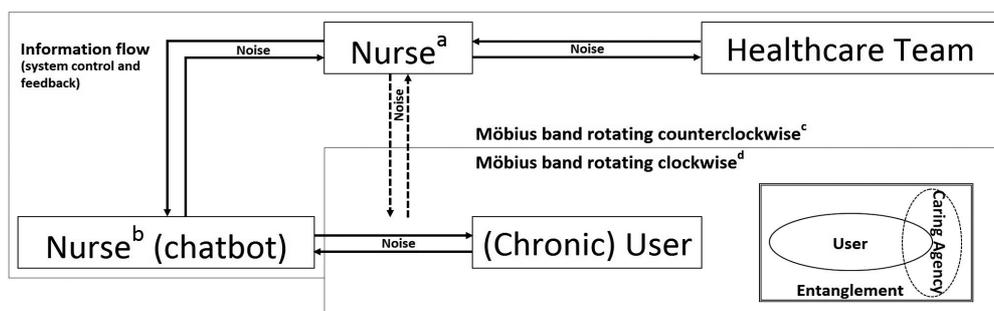

^{a, b}Superpositional "caring agency"
^{c, d}Two-edge entanglement in network multilayering

Fig. 1 : Chatbot-based telenursing model for chronic disease self-management support

gaps) by superpositioning and entanglement (Fig. 2) with functions of the “nursing agency” (the nurse-led care team), exhibit self-organization (learning from conversations), cognitive and emotional response (reproducing human intelligence and emotions to be comforting), and allow collaborative healthcare management.

EFFECTS OF NURSE CHATBOT

Systematic review of healthcare chatbots by Laranjo *et al.* (15) showed a significant effect in reducing depression. Patients receiving chatbot care are expected to have improved adherence to medication regimen and health-promoting behaviors, and control of symptoms as their self-efficacy increase (e.g., blood pressure control, blood sugar control, and cancer fatigue). Another way to valorize outcomes is by Maslow’s Hierarchy of Needs (26) of users (e.g., mental health chatbots have a positive impact on safety, belongingness, and self-esteem). Information flows will be vital to maintain CDSMS. Diffusion, cascades, and ‘rewiring’ are the important phenomena to analyze quantitatively which will give insight to communication capacity and autonomy of the ‘Nurse Chatbot’. Patient satisfaction is theorized as a function of user sentiment and interaction patterns with the chatbot.

Robustness of chatbot operation

Network analysis by Renoust (25) is the suitable approach for the kind of data and the intricacies of high dimensional visualization. According to Tanioka *et al.* (27) humanoid robots can be qualified to care if they can deeply observe, understand/judge, empathize, respond quickly to changing conditions, and personalize care, and normalize the discourses pertaining to ethical and safety issues. Hence, a ‘Nurse Chatbot’ is expected to mimic them at the interface of the human nurse and the human patient. Conventional designs have to be remodeled by “humanizing” the chatbot technology (blend of cognitive and affective algorithms) and “virtualizing” (reproducing) the nurse-patient relationship in human-chatbot transactions. Critical in the success of telenursing with chatbots is user satisfaction. Robustness of chatbot operation should be able to approximate real world effectiveness of CDSMS programs. CDSMS decision trees provide codifiable rules for chatbot interventions, e.g., the quasi-experimental study by Hernandez in 2013 (28) to control primary hypertension among industrial workers as programming template.

Challenges in chatbot designs


Recent BotAnalytics survey has shown that about 40% of users stop using chatbots after the first encounter and then 25% after the

second (29) indicating poor natural language processing/NLP and intelligent response. Third generation chatbots running on neural networks achieve real human responses (30, 31) since the dialogue manager is a hybrid of generation-based and rule-based models. Behavior change communication works well with a persuasive system design (32). Artificial intelligence in the ‘Nurse Chatbot’ system (Fig. 3) is inspired by Froese’s (33) elaboration of biological cognition where the interaction of ‘pre-reflective’ and ‘reflective’ processes result to knowledge but is situation dependent (referring to conditions of transactions) based on second-order cybernetics. ‘Pre-reflective’ process acts on the training data set (e.g., text corpus, chat conversations, feedbacks, etc.). Deep learning functions to extract patterns and to predict such occurrences using a recurrent neural network algorithm. On the other hand, the ‘reflective’ is NLP which actually means ‘distinguishing’/decoding text inputs into word meanings and associations. Message replies are produced by ‘reformulating’ (encoding) and then ‘validating’ (decoding) the NLP output with the training data. Overall, system operations adjust to set goals.

Conversational ambiguities can be overcome by employing any of the following combinations : (a) ontology-based system to ‘personalize’ responses (34) ; (b) context-sensitive generation (35) ; (c) dialogue learning ; (d) implicit feedback (e.g., sentiments in texts) ; and (e) reinforcement learning (36) based on literature. The prototype capitalizes on the advantages of goal-oriented workflows (37), chat-oriented data training and open-domain generated response (38) augmented by latent (input and output) dialog variables (39, 40). To put ‘empathy’ in CDSMS transactions, the emphatic module (affective/sentiment processing) will recognize emotional cues from human language (41). Chatbot-to-chatbot learning (37) and chatbot system integration with the Internet of Things/IoT (42) are functions to consider for greater convergence.

Ethico-compassionate chatbot behavior

To the knowledge of the author, ego-centric chatbot behavior has not been studied yet . Therefore, diffusion simulation data will be deduced from social (human-to-human) network diffusion and cascade models, e.g., Zhang, Fang, Chen, and Tang (43) ; Lelarge (44) ; and Mehdiabadi, Rabiee, and Salehi (45) which may lead to ‘misrepresentation’ or ‘discourse of representation’ and confirmation bias (values are interpreted predilected to the observer ; subjectivity) or ‘discourse of understanding,’ i.e.imposing separation of subject (caring agents) and object (transactions) to explain the reality (telenursing) instead of weaving it and forging heuristic/intuitive generalizations with scant regard of the multiple dimensions in ‘knowing’ a phenomenon respectively (46). Dong, Hui and He’s approach to structural analysis of chat data (47) is useful on

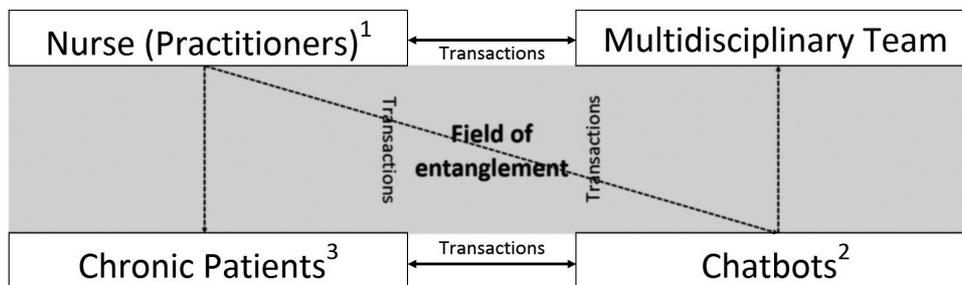

¹Upstream agents/virtual operators
 ²Interlocutors/autonomous dialogue agents/change agents
 ³Downstream agents/real world actors/network “co-operators”

Fig2 : Configuration of agents for CDSMS transactions

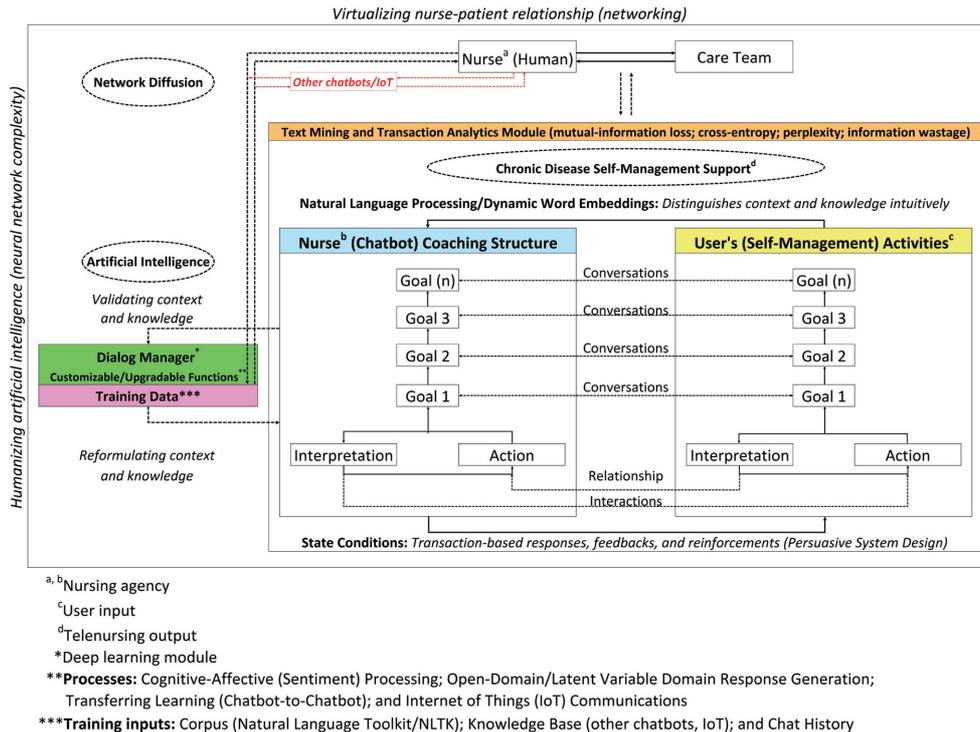


Fig. 3 : 'Nurse Chatbot' architecture, system domains, and operation

inferring 'cross-entropy' (redefined as transmission encoding error ; 'misinformation') and 'perplexity' (redefined as transmission decoding error ; 'disinformation'), e.g., *k*-gram of words (48). Nearest-neighbor statistics provides the analysis of entropy and mutual information between agents (49). 'Mutual Information Loss,' in theory, surges from [uncontrolled] informational uncertainties for producing the recursive, 'nudging' actions in order to change or target patient/client (problematic) health behavior(s) during CDSMS transactions (as entropy), unharmonized disagreements (as perplexity), and information overload. The degree of perplexity is inversely related to the amount of information exchanged, i.e. lowering perplexity means increasing information (50) to decrease uncertainty in transactions while increasing 'information wastage ratio' (21) on the other side. These assumptions, when validated, will expose the complexity and relativity of the phenomenon of "caring".

Converting the Technology Acceptance Model/TAM into structural equations, the way Erasmus, Rothmann, and van Eeden (51) have demonstrated, will be prudent not only for calculating probabilistic adoption of the 'Nurse Chatbot' but also for testing variables' state transitions with Petri nets/agent-based modeling, stochastic 'decay,' and resistance to information flow over time (e.g., knowledge, regression with CDSMS, etc.). TAM elements could be manipulated to act as gatekeepers and then visualized in a multilayer network. It may permit simulation of the amount of information (e.g., bytes, *n*-gram) significant to inform and to persuade users based on the equation by Flor (21).

Three out of eleven ethical themes surfacing from AI technologies echo global concerns, namely : 'Privacy and Misuse,' 'Transparency,' and 'Abuse and Human Rights' (26). In the case of 'Nurse Chatbot,' the following solutions should be validated respectively : data encryption and artificial neural network-based cybersecurity ; informed consent/explicit system documentation/full disclosure of chatbot decision support/monitoring of information asymmetries ; and 'Bad Word Filter' in NLP algorithm.

Chatbot design and operation are covered in the 'Ergonomics of Human-System Interaction' quality measures by the International Organization for Standardization/ISO, stipulated as 'usability' (ISO 9241-11) in terms of : 'effectiveness' (functionality and humanity, e.g., passing the Turing test of intelligent behavior) ; 'efficiency' (performance) ; and 'satisfaction' (affect, ethics and behavior, and accessibility) according to Radziwill and Benton's findings (52).

CONCLUSION

Feasibility of a 'Nurse Chatbot' for chronic care is worth exploring on the benefits of increasing patient/client access to healthcare information and maximizing the potential of AI to bridge the gap between demand and supply of human healthcare providers, particularly in the delivery of a 'robust' level of CDSMS via novel telenursing (service) model as proposed in this article. The design features ascribed to what constitutes a 'Nurse Chatbot' and how it will work is integrative at the current level of innovation in an attempt to humanize "caring" by non-human agents, which is an "anthropomorphic" (26) disposition with AI technologies ; and to replicate the properties of "caring" communicatively via telenursing in the context of combining cybernetics and quantum network theory. At the moment, challenges do not just glean rigors of explicit coding mounted on the frame of computing and nursing rather are forked between technology acceptance, possible outcomes, and ethics as 'metadiscursive' among stakeholders. Hence, the spectra of interests and opportunities prompting diffusion of AI (in multisector landscape) will always be in a state of flux. Nevertheless, it is plausible to inquire both theoretical dissonance/divide and polarization among scholars regarding the "caring" dimension(s) in the presence of AI. The 'Nurse Chatbot' and its implementation could be a metaphor of "cross-fertilization" of nursing beyond the neighboring sciences, creating borderless

fields of knowledge instead of collecting knowledge into silos and isolating it within the field.

CONFLICT OF INTEREST

The author declares no conflict of interest.

ACKNOWLEDGEMENT

The author would like to thank the following : Dean, Dr. Alexander G. Flor and FICS Professors, in particular, Dr. Felix R. Librero (Professor Emeritus), Dr. Grace J. Alfonso (Former Chancellor), Dr. Melinda F. Lumanta (Vice Chancellor for Academic Affairs), Dr. Jean A. Saludadez (Vice Chancellor for Finance and Administration), and Dr. Melinda dP. Bandalaria (Chancellor) at UPOU, for fostering research scholarship under the Doctor of Communication Program ; Dr. Rozzano C. Locsin and Dr. Tetsuya Tanioka of Tokushima University, Japan, for their expert recommendations ; and Dean, Dr. Farhan Alshammari for his support to education, training, and research of the Faculty members at UOH-CON. Special thanks to Dr. Eddieson A. Pasay-an, (Assistant Professor), for his time to accommodate peer consultations, and to other colleagues at UOH-CON, namely : Dr. Richard Dennis J. Dayrit, (Assistant Professor and Vice Dean for Quality and Development) ; Mr. Vincent Edward R. Butcon (Lecturer) ; Mr. Reinhard Roland T. Ebol (Nurse Specialist) ; and Ms. Sheila S. Torres (Lecturer), for their helpful comments about the author's ideas. Profound gratitude is expressed to Mr. Renato O. Hernandez, Mrs. Irma T. Hernandez, and Ms. Jan Cressa T. Hernandez (author's immediate family), Ms. Rhea Mae G. Delgado and her family, and Ms. Marieta R. Manza (Managing Editor of "Tagumpay" Magazine in October 2017 Issue), for their love, prayers, and support during "The Second International Seminar and Workshop on Technological Competency as Caring in the Health Sciences" on August 17 to 19, 2018 at Tokushima University in Tokushima, Japan. Thanks to Dr. Cyrus P. Tuppal (Adjunct Faculty Member of St. Paul University Philippines System), for sharing the vital information in joining the aforementioned conference, and to Mr. Domingo C. Navarro, Jr. (online artist at <https://www.facebook.com/sanjunarts/>), for designing the iconic human image of the 'Nurse Chatbot' that was used in the oral presentation. Also, thanks to The Journal of Medical Investigation Committee members under the University of Tokushima School of Medicine, Japan for their acceptance of this article. The article's future direction is set by professional nursing care inspirations from Ms. Grace Dianne B. Pelño. All this hard work for God's glory!

REFERENCES

1. Nuffield Council on Bioethics, London. Artificial intelligence (AI) in healthcare and research [bioethics briefing note]. Nuffield Bioethics [Internet]. 2018 May [cited 2018 July 23] ; 1-8. Available from : <http://nuffieldbioethics.org/wp-content/uploads/Artificial-Intelligence-AI-in-healthcare-and-research.pdf>
2. Collier M, Fu, R, Yin L. AI : an engine for growth. Accenture [Internet]. 2017 [cited 2018 May 19] ; 1-8. Available from : https://www.accenture.com/t20171215T032059Z__w__us-en/_acnmedia/PDF-49/Accenture-Health-Artificial-Intelligence.pdf#zoom=50
3. LeCun Y, Bengio Y, Hinton G. Deep learning. Nature [Internet]. 2015 May 28 [cited 2018 May 19] ; 521 : 436-444. Available from : <https://www.cs.toronto.edu/~hinton/absps/NatureDeepReview.pdf>
4. Goodfellow I, Bengio Y, Courville A. Deep learning. MIT Press [Internet]. 2016 Nov 18 [cited 2018 May 19] ; 1-785. Available from : <https://github.com/janishar/mit-deep-learning-book-pdf/blob/master/complete-book-bookmarked-pdf/deeplearningbook.pdf>
5. USTWO London. AI : empathy and designing for the future of health. 2017 May 19 [cited 2018 May 19] ; 1-20. Available from : <https://usweb-cdn.ustwo.com/ustwo-production/uploads/2017/05/AI-Empathy-and-Designing-for-the-Future-of-Health2.pdf>
6. Jiang F, Jiang Y, Zhi H, Dong Y, Li H, Ma S, Wang Y, Dong Q, Shen H, Wang Y. Artificial intelligence in healthcare : past, present and future. Stroke Vasc Neurol [Internet]. 2017 Jun 22 [cited 2018 May 19] ; 2(e000101) : 230-243. Available from : <https://svn.bmj.com/content/svnbmj/2/4/230.full.pdf>
7. Chamberlain G. Deconstructing the telehealth industry : part II improving the access points of healthcare delivery. Chicago, Illinois : Ziegler [Internet]. 2018 [cited 2018 Aug 10] ; 1-28. Available from : http://triple.care/wp-content/uploads/2018/05/Ziegler_Virtual-Care-White-Paper_Spring-2018-PRINTABLE.pdf
8. Liu JX, Goryakin Y, Maeda A, Bruckner T, Scheffler R. Global health workforce labor market projections for 2030. World Bank, Health Nutrition and Population Global Practice Group [Internet]. 2016 Aug [cited 2018 May 19] ; Policy Research Working Paper 7790 : 1-38. Available from : <http://documents.worldbank.org/curated/en/546161470834083341/pdf/WPS7790.pdf>
9. Schwamm LH, Chumbler N, Brown E, Fonarow GC, Berube D, Nystrom K, Suter R, Zavala M, Polsky D, Radhakrishnan K, Lactman N, Horton K, Malcarney MB, Halamka J, Tiner AC. Recommendations for the implementation of telehealth in cardiovascular and stroke care, a policy statement from the American Heart Association. Circulation [Internet]. 2017 Feb 14 [cited 2018 Jul 13] ; Policy Statement 135 : e24-e44. Available from : <http://circ.ahajournals.org/content/circulationaha/135/7/e24.full.pdf>
10. Masayuki M. The effects of artificial intelligence and robotics on business and employment : evidence from a survey on Japanese firms. Japan : Research Institute of Economy, Trade and Industry [Internet]. 2016 Apr [cited 2018 Jul 13] ; Discussion Paper Series 16-E-066 : 1-16. Available from : <https://www.rieti.go.jp/jp/publications/dp/16e066.pdf>
11. Urgeon, TJ. The new digital economy and development, UNCTAD technical notes on ICT for development. United Nations Conference on Trade and Development [Internet]. 2017 Oct 8 [cited 2018 Jul 21] ; 8 : 1-37. Available from : http://unctad.org/en/PublicationsLibrary/tn_unctad_ict4d08_en.pdf
12. TM Capital. The next generation of medicine : artificial intelligence and machine learning [Internet]. 2017 Dec 11 [cited 2018 Aug 10] ; 1-25. Available from : <https://www.tmcapital.com/wp-content/uploads/2017/11/TMCC20AI20Spotlight20-202017.10.2420vF.PDF>
13. Huston C. The impact of emerging technology on nursing care : warp speed ahead. Online J Issues Nurs [Internet]. 2013 May 31 [cited 2018 May 19] ; 18(2) : Manuscript 1,1-14. Available from: <http://ojin.nursingworld.org/MainMenuCategories/ANAMarketplace/ANAPeriodicals/OJIN/TableofContents/Vol-18-2013/No2-May-2013/Impact-of-Emerging-Technology.html>
14. PricewaterhouseCoopers. Sherlock in health—how artificial intelligence may improve quality and efficiency, whilst reducing healthcare costs in Europe [Internet]. 2017 Jun [cited 2018 Aug 10] ; 1-24. Available from : <https://www.pwc.at/de/>

- publikationen/branchen-und-wirtschaftsstudien/pwc_sherlock_in_health_0717.pdf
15. Laranjo L, Dunn AG, Tong HL, Kocaballi AB, Chen J, Bashir R, Surian D, Gallego B, Magrabi F, Lau AYS, Coiera E. Conversational agents in healthcare : a systematic review. *J Am Med Inform Assoc* [Internet]. 2018 Jul 11 [cited 2018 Oct 11] ; 25(9) : 1248-1258. Available from : <https://academic.oup.com/jamia/article-pdf/25/9/1248/25643433/ocy072.pdf>
 16. Tanioka T. The development of the transactive relationship theory of nursing (TRETON) : a nursing engagement model for persons and humanoid nursing robots. *Int J Nurs Clin Pract* [Internet]. 2017 Mar 2 [cited 2018 Jun 25] ; 4(223) : 1-8. Available from : <https://www.graphyonline.com/archives/archivedownload.php?pid=IJNCP-223>
 17. Dubberly H, Pangaro P. Introduction to cybernetics and the design of systems [Internet]. 2010 Jan [cited 2018 Oct 23] ; Working Draft 4.1 : 113-167. Available from : https://sva.instructure.com/files/16079482/download?download_frd=1
 18. Kupervasser O. New cybernetics and the application of its principles in physics. *J Syst Cybern Inf* [Internet]. 2013 Sep 18 [cited 2018 Oct 23] ; 11(7) : 74-83. Available from : <https://arxiv.org/ftp/arxiv/papers/0911/0911.2610.pdf>
 19. Craig RT. Communication theory as a field. *Communication Theory* [Internet]. 1999 [cited 2018 Oct 24] ; 2 : 119-161. Available from : <http://www.clt.astate.edu/mhayes/Craig%20Article.PDF>
 20. Prasad G. Understanding text... [Internet]. 2017 Jul 14. [cited 2018 Oct 12]. Available from : <https://chatbotslife.com/understanding-text-808dea7a0ae2>
 21. Flor AG. Development communication praxis. UP Open University [Internet]. 2007 [cited 2018 Nov 1] : [241 p.]. Available from : https://www.researchgate.net/profile/Alexander_Flor/publication/276929356_Development_Communication_Praxis/links/555c355108ae8f66f3ade61b/Development-Communication-Praxis.pdf
 22. Locsin R, Purnell M. Advancing the theory of technological competency as caring in nursing : the universal technological domain. *Intl J for Hum Caring* [Internet]. 2015 Jan [cited 2018 Jun 25] ; 19 : 50-54. Available from : https://www.researchgate.net/publication/295254978_Advancing_the_Theory_of_Technological_Competency_as_Caring_in_Nursing_The_Universal_Technological_Domain
 23. Pirker A, Wallnöfer J, Dür W. Modular architectures for quantum networks. *New J Phys* [Internet]. 2018 Jul 9 [cited 2018 Oct 23] ; 20(053054) : 1-24. Available from : <https://arxiv.org/pdf/1711.02606.pdf>
 24. Saludadez JA. Accomplishing education in open universities through the agency of digital media. *Asian Association of Open Universities Journal* [Internet]. 2015 [cited 2018 Oct 24] ; 10(2) : 67-79. Available from : <https://www.emeraldinsight.com/doi/pdfplus/10.1108/AAOUJ-10-02-2015-B006>
 25. Renoust B. Analysis and visualisation of edge entanglement in multiplex networks [dissertation]. France : University of Bordeaux [Internet]. 2013 Dec 18 [cited 2018 Oct 27] : [201 p.]. Available from : <http://renoust.com/pub/Renoust2013-Thesis-EN.pdf>
 26. Institute of Electrical and Electronics Engineers Global Initiative on Ethics of Autonomous and Intelligent Systems. Ethically aligned design a vision for prioritizing human well-being with autonomous and intelligent systems version 2 [Internet]. 2018 [cited 2018 Oct 22] ; 1-263. Available from : https://standards.ieee.org/content/dam/ieee-standards/standards/web/documents/other/ead_v2.pdf
 27. Tanioka T, Osaka K, Locsin R, Yasuhara Y, Ito H. Recommended design and direction of development for humanoid nursing robots perspective from nursing researchers. *Intelligent Control and Automation* [Internet]. 2017 May 26 [cited 2018 Jun 25] ; 8 : 96-110. Available from : https://file.scirp.org/pdf/ICA_2017052616121905.pdf
 28. Hernandez JP. Effect of nurse-led client self-management support program on adherence to health-promoting behaviors and blood pressure control among industrial-based workers with primary hypertension. In : Burns & Grove's *Understanding Nursing Research, Building an Evidence-Based Practice*. Teresita IB, editor. Singapore : Elsevier/Saunders ; 2013 [cited 2018 Jun 25] ; 293,302-303,410-412 (algorithm, available from : http://www.researchgate.net/publication/329216439_Effect_of_nurse-led_client_self-management_support_program_on_adherence_to_health-promoting_behaviors_and_blood_pressure_control_among_industrial_based_workers_with_primary_hypertension)
 29. Fadhil A. Can a chatbot determine my diet? : addressing challenges of chatbot application for meal recommendation. *arXiv* [Internet]. 2018 Feb 25 [cited 2018 Oct 22] ; 1-6. Available from : <https://arxiv.org/ftp/arxiv/papers/1802/1802.09100.pdf>
 30. Bhagwat VA. (2018). Deep learning for chatbots [master's project]. San José State University Library [Internet]. 2018 [cited 2018 Oct 22] ; 1-55. Available from : https://scholarworks.sjsu.edu/cgi/viewcontent.cgi?article=1645&context=etd_projects
 31. Vinyals O, Le QV. A neural conversational model. In : *Proceedings of the 31st International Conference on Machine Learning* ; 2015 ; Lille, France. *J Mach Learn Res* [Internet] ; 2015 Jul 22 [cited 2018 Oct 28] ; 37 : 1-8. Available from : <https://arxiv.org/pdf/1506.05869.pdf>
 32. Oinas-Kukkonen H, Harjumaa M. (2009). Persuasive systems design : key issues, process model, and system features. *Assoc Inf Syst* [Internet]. 2009 Jan 3 [cited 2018 Oct 22] ; 24 (28) : 485-501. Available from : http://www.few.vu.nl/~wissen/downloads/seminar/2011_Oinas-kukkonen.pdf
 33. Froese T. From second-order cybernetics to enactive cognitive science : Varela's turn from epistemology to phenomenology. *Syst Res Behav Sci* [Internet]. 2011 August 26 [cited 2018 Oct 28] ; [15 p.]. Available from : https://pdfs.semanticscholar.org/fc54/7c79c48b30679456a0db0dc7a24b2e11a3eb.pdf?_ga=2.267549899.455345514.1540314432-1396875536.1510405322
 34. Tielman M, van Meggelen M, Neerinx MA, Brinkman WP. An ontology-based question system for a virtual coach assisting in trauma recollection. In : *15th International Conference on Intelligent Virtual Agents*. In : Brinkman WP *et al.*, editors. *Lecture notes in artificial intelligence*. Switzerland : Springer International Publishing [Internet]. 2015 [cited 2018 Oct 6] ; 9238 : 17-27. Available from : https://www.springer.com/cda/content/document/cda_downloaddocument/9783319219950-c2.pdf?SGWID=0-0-45-1519976-p177579230
 35. Zhang WN, Cui Y, Wang Y, Zhu Q, Li L, Zhou L, Liu T. Context-sensitive generation of open-domain conversational responses. In : *Proceedings of the 27th International Conference on Computational Linguistics* ; 2018 Aug 20-26 [cited 2018 Oct 28] ; Santa Fe, New Mexico, USA. p. 2437-2447. Available from : <http://aclweb.org/anthology/C18-1206>
 36. Zhang WN, Li L, Cao D, L T. Exploring implicit feedback for open domain conversation generation. In : *32nd AAAI Conference on Artificial Intelligence* ; 2018. Association for the Advancement of Artificial Intelligence [Internet] ; 2018 Apr 25 [cited 2018 Oct 28] ; 547-554. Available from : <https://www.aaai.org/ocs/index.php/AAAI/AAAI18/paper/view/16493/15731>

37. Ilievski V, Musat C, Hossmann A, Baeriswyl M. Goal-oriented chatbot dialog management bootstrapping with transfer learning. arXiv [Internet]. 2018 Jul 24 [cited 2018 Nov 1] : [7 p.]. Available from : <https://arxiv.org/pdf/1802.00500v2.pdf>
38. Nguyen H, Morales D, Chin T. A neural chatbot with personality. Stanford University [Internet]. 2017 [cited 2018 Oct 28] ; 1-7. Available from : <https://web.stanford.edu/class/cs224n/reports/2761115.pdf>
39. Zhao T. Learning generative end-to-end dialog systems with knowledge [dissertation draft]. Carnegie Mellon University, Pittsburgh, PA [Internet]. 2017 Nov 21 [cited 2018 Oct 29] : [81 p.]. Available from <http://www.cs.cmu.edu/~tianchez/data/TianchezPhdProposal.pdf>
40. Latent topic conversational models. In : International Conference on Learning Representations [Internet] ; 2018 [cited 2018 Oct 29] ; 1-13. Available from : <https://openreview.net/pdf?id=S1GUgxcCW>
41. Tanioka T, Yasuhara Y, Osaka K, Ito H, Locsin R. Nursing robots robotic technology and human caring for the elderly. Okayama, Japan : Fukuro ; 2017. p. 1-259
42. Kar R, Haldar R. Applying chatbots to the internet of things : opportunities and architectural elements. International Journal of Advanced Computer Science and Applications [Internet]. 2016 Nov [cited 2018 Nov 1] ; 7(11) : 147-154. Available from : https://thesai.org/Downloads/Volume7No11/Paper_19-Appling_Chatbots_to_the_Internet_of_Things.pdf
43. Zhang J, Fang Z, Chen W, Tang J. Diffusion of "Following" links in microblogging networks. Journal of IEEE Transactions on Knowledge and Data Engineering [Internet]. 2014 Jan [cited 2018 Oct 29] ; 5 : 1-14. Available from : <http://zhanpengfang.github.io/file/TKDE15-Follow-Influence.pdf>
44. Lelarge M. Diffusion and cascading behavior in random networks. Games and Economic Behavior [Internet]. 2012 July [cited 2018 Oct 29] ; 75(2) : 752-775. Available from : <https://www.sciencedirect.com/science/article/pii/S0899825612000498?via%3Dihub>
45. Mehdiabadi ME, Rabiee HR, Salehi M. Diffusion-aware sampling and estimation in information diffusion networks. In : International Conference on Social Computing [Internet]. 2012 [cited 2018 Oct 29] : [8 p.]. Available from : <http://web.engr.illinois.edu/~eslamim2/publications/Eslami-SocialCom12.pdf>
46. Mumby DK. Modernism, postmodernism, and communication studies : a rereading of an ongoing debate. Communication Theory [Internet]. 1999 Feb 1 [cited 2018 Nov 1] ; 7(1) : 1-28. Available from : https://www.researchgate.net/publication/227690897_Modernism_Postmodernism_and_Communication_Studies_A_Rereading_of_an_Ongoing_Debate
47. Dong H, Hui SC, He Y. Structural analysis of chat messages for topic detection. Online Information Review [Internet]. 2006 May 2 [cited 2018 Oct 29] ; 1-33. Available from : <https://www.clips.uantwerpen.be/~walter/educational/material/chatMsgAnalysis06.pdf>
48. Kobayashi H. Perplexity on reduced corpora. In : Proceedings of the 52nd Annual Meeting of the Association for Computational Linguistics ; 2014 Jun 23-25 ; Baltimore, Maryland, USA. Assoc Comput Linguist [Internet] ; 2014 [cited 2018 Nov 1] ; 1 : 797-806. Available from : <http://aclweb.org/anthology/P14-1075>
49. Varoquaux G. Estimating entropy and mutual information with scikit-learn. GitHub Gist [Internet]. 2014 Sep 16 [cited 2018 Nov 1]. Available from : <https://gist.github.com/GaelVaroquaux/ead9898bd3c973c40429/revisions>
50. Meteer MM. Perplexity and smoothing. In : CS 136 Lecture 11 Language Modeling ; Brandeis University, Waltham, Massachusetts, USA [Internet]. 2018 Oct 12 [cited 2018 Nov 1] : [45 p.]. Available from : http://www.cs.brandeis.edu/~cs136a/CS136a_Slides/CS136a_Lect11_PerplexityAndSmoothing.pdf
51. Erasmus E, Rothmann S, van Eeden C. (2015). A structural model of technology acceptance. SA Journal of Industrial Psychology [Internet], 2015 Apr 14 [cited 29 Oct 2018] ; 41 (1) : 1-12. Available from : <https://sajip.co.za/index.php/sajip/article/view/1222>
52. Radziwill N, Benton M. Evaluating quality of chatbots and intelligent conversational agents. Computing Research Repository [Internet]. 2017 Apr 15 [cited 2018 Oct 30] : [21 p.]. Available from : <https://arxiv.org/ftp/arxiv/papers/1704/1704.04579.pdf>